

**GB70** 12V **2000A** | **8.0L** **6.0L**  
Lithium | Gas Diesel

Lead Acid  
Wet Gel MF EFB AGM  
Auto | Marine | RV | Powersport | Lawn & Garden

# NOCO BOOST<sup>®</sup> HD<sup>™</sup> JUMP STARTER



## START DEAD BATTERIES.<sup>™</sup>

Gas And Diesel Cars, Trucks, Boats, And More.

UltraSafe, ultra-compact, rugged, and portable lithium-ion jump starter. Features spark-proof technology and reverse polarity protection. Ideal for a wide range of small vehicle applications to larger vehicles with 8.0L gas and 6.0L diesel engines. Provides remote power with 12V plug (included) for tire pumps, inverters, & phone chargers.



### SPARK PROOF.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

### JUMP START. 40X

Full power to jump start a vehicle up to 40 times in one charge. Compatible with engines up to 8.0L gas and 6.0L diesel.

### USB CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

### 400 LUMENS. 8X LED

The GB70 portable car battery jump starter integrates with a high-output 400 lumen LED flashlight with 7 light modes: low, medium, high, flashing, strobe, and emergency SOS.

NOCO  
30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

**NOCO<sup>®</sup>**

# MORE POWER.

A Fraction Of The Size.

## 4X

Lighter & Smaller

Compact, portable, pocket-sized jump starter that stores easily in a vehicle.

## 1 Year+

Holds Charge 4x Longer

The GB70 holds the charge four longer to extend battery power life and eliminate charge time.

## 3X

Fast Recharge

Go from zero to jump starting in 15 minutes, fully charges in just over 2 hours.

Compared to Leading Traditional Lead Acid Jump Starters



**Error LED.** Illuminates Red if reverse polarity is detected.



**Manual Override.** Is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.

**NOCO** Patented Technology

Patented: visit [no.co/patents](http://no.co/patents)



Recharge Unit from any USB or 12V port.

**USB** 2.1A

Charge virtually any USB device, including Smartphones and Tablets.

## 12V

Portable Power

Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.

## Technical Specifications



<b>Internal Battery:</b>	56 Watt-Hour Lithium Ion	<b>Micro USB (Input) &amp; USB (Output):</b>	5V, 2.1A
<b>Peak Current Rating:</b>	2000A	<b>Housing Protection:</b>	IP65 (w/ Ports closed)
<b>Operating Temperature:</b>	-4°F to +122°F (-20°C to +50°C)	<b>Cooling:</b>	Natural Convection
<b>Charging Temperature:</b>	32°F to +104°F (0°C to +40°C)	<b>Dimensions (LxWxH):</b>	8.8 x 6.0 x 2.8 in
<b>Storage Temperature:</b>	-4°F to +122°F (-20°C to +50°C)	<b>Unit Weight:</b>	4 lbs
<b>12V (Input):</b>	12V (3A)	<b>Unit Weight &amp; Accessories:</b>	5 lbs
<b>12V (Output):</b>	12V (15A)	<b>LED Flashlight Brightness:</b>	400 Lumens

## Recharging a GB70 (for reference, results may vary)

USB Charger Rating	Charging Time	12V Fast Charge
<b>.5A</b>	28hr	3A @ 12V (36W) 2-3hr
<b>1A</b>	14hr	
<b>2A</b>	7hr	

## What's In The Box

- GB70 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

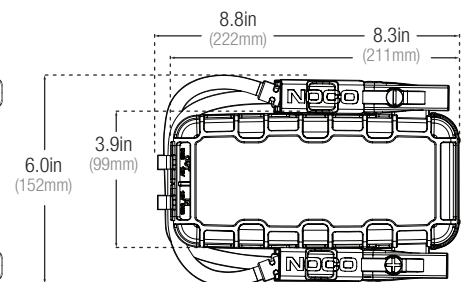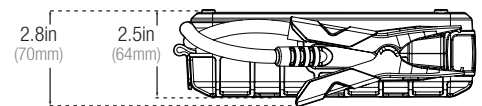

### Retail Packaging:

Dimensions: 7.28"x4.84"x9.80"  
Weight: 5.09lbs  
UPC: 0-46221-15005-6

### Inner Carton:

Dimensions: 10.27"x7.72"x5.39"  
Weight: 5.44lbs

### Master Carton:

Dimensions: 15.98"x10.83"x11.50"  
Weight: 22.60lbs  
Quantity: 4  
UCC: 10046221150053

### Units Per Pallet:

NA - 180 Units  
EU - 120 Units



NOCO

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

**NOCO**